


# WQB 4000SOPS

物品号: T0053370699

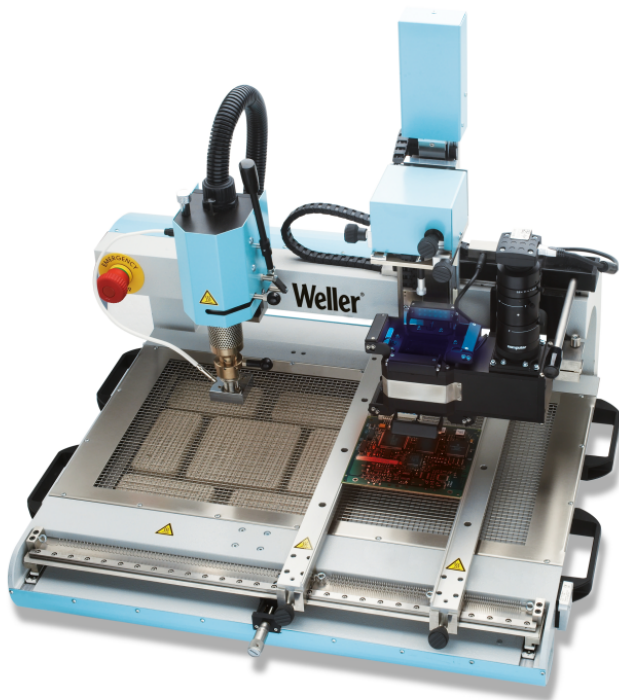

## Benefits

- > 2300 W / 230 V
- > BGA/SMT返修系统
- > 通过贴装系统摄像头实现元件贴装


In addition we recommend:



Fume extraction devices



Preheating plates



Zubehoer



Soldering Tips



### Technical Data

尺寸, 长 x 宽 x 高 (Inch)	24,8 x 24,8 x 25,6 (static)
尺寸, 长 x 宽 x 高 (mm)	692 x 580 x 680 (static)
Workspace L x B x H (Inch)	43,3 x 25,6 x 26,8
Workspace L x B x H (mm)	Dynamisch: 1030 x 580 x 680
Recommended PCB size (mm)	---
Recommended component size (mm)	4,5 x 4,5 - 50 x 50
压缩空气接口	气动管, 外径6 mm (0.24英寸)
Compressed air connection / remark	---
Compressed air kPa/bar	400 - 600 / 4 - 6
耗气量l/min	60 - 100
最大热风量l/min	5 - 50
抗静电	on
噪音等级 (1m距离) dB(A)	< 69
大概重量kg	40
功率消耗	2300 W
Nominal power top heater (W)	700
Nominal power bottom heater (W)	1600
防护等级	1
电压	230 V / 50-60 Hz
Temp. range / Top Heater (°C)	50 - 400
Temp. range / Bottom Heater (°C)	50 - 400
Optical placement	on
Optical placement system	Splitoptik
Temp. accuracy top heater	± 10°C (± 18°F)
Temp. accuracy bottom heater	tdb
Thermoelement Anschluss	3 x Type-K

### Owning the bench



PROFESSIONAL

PROFESSIONAL



FILTRATION

FILTRATION



EREM

EREM



XCELITE

XCELITE