

# R&S® ESRP EMI Test Receiver Specifications



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Preselection and preamplifier (R&S®ESRP-B2 option).....	6
RF preamplifier (R&S®FSV-B22 option) .....	6
IF and resolution bandwidths .....	6
Level.....	7
Trigger functions.....	12
Audio demodulation .....	12
Inputs and outputs .....	13
General data.....	15
<b>Options .....</b>	<b>16</b>
R&S®ESR-B10 external generator control .....	16
R&S®FSV-B9 tracking generator (spectrum analyzer mode).....	16
R&S®FSV-B30 DC power supply for 12 V/24 V supply voltage .....	17
R&S®FSV-B32 Lithium-ion battery pack.....	17
R&S®FSV-B34 charger for R&S®FSV-B32 Lithium-ion battery pack.....	17
R&S®ESRP-K56 IF analysis .....	17
<b>Ordering information .....</b>	<b>18</b>
Options.....	18
Upgrades.....	18
Recommended extras.....	18

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

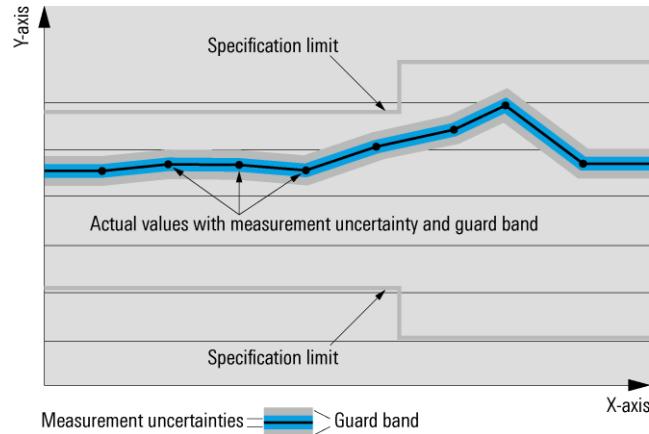

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

Operating modes	EMI test receiver
	spectrum analyzer

## Frequency

Frequency range	R&S®ESRP3	
	AC coupled	10 MHz to 3.6 GHz
	DC coupled	9 kHz to 3.6 GHz
	R&S®ESRP7	
	AC coupled	10 MHz to 7 GHz
	DC coupled	9 kHz to 7 GHz
Frequency resolution	with R&S®ESRP-B29 option, DC coupled	10 Hz to max. frequency
	receiver mode	0.1 Hz
	analyzer mode	0.01 Hz

<b>Reference frequency, internal</b>		
Accuracy		$\pm((\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +45 °C)	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 option, model .02	$\pm 1 \times 10^{-7}$
	with R&S®FSV-B4 option, model .03	$\pm 1 \times 10^{-8}$
Max. initial calibration accuracy	standard	$\pm 5 \times 10^{-7}$
	with R&S®FSV-B4 option	$\pm 5 \times 10^{-8}$


<b>Frequency readout (analyzer mode)</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	691
	range	
	spectrum analyzer	101 to 32 001
	EMI measurement	101 to 200 001
Marker tuning frequency step size	marker step size = sweep points	$\text{span}/(\text{sweep points} - 1)$
	marker step size = standard	$\text{span}/(\text{default sweep points} - 1)$
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1 \%$

<b>Receiver scan</b>		
Scan		scan with max. 10 subranges with different settings
Scan modes		normal scan, time domain scan <sup>1</sup>
Measurement time	normal scan, per frequency	50 $\mu$ s to 100 s
	time domain scan, per subrange <sup>1</sup>	50 $\mu$ s to 100 s
Number of trace points		up to 4 000 000
Frequency step size	normal scan	min. 1 Hz
	time domain scan <sup>1</sup>	$0.25 \times \text{resolution bandwidth}$
<b>Time domain scan <sup>1</sup></b>		
Frequency segment processed in parallel	RBW = 200 Hz	0.66 MHz
	RBW = 9 kHz	30 MHz
	RBW = 120 kHz	24.6 MHz
	RBW = 1 MHz	25.6 MHz
FFT overlap factor		$\geq 93 \%$

<sup>1</sup> Requires R&S®ESRP-K53 option.

<b>Spectrum analyzer</b>		
Sweep time range	span = 0 Hz	1 $\mu$ s to 16 000 s
	span $\geq$ 10 Hz, swept	1 ms to 16 000 s <sup>2</sup>
	span $\geq$ 10 Hz, FFT	7 $\mu$ s to 16 000 s <sup>3</sup>
Sweep time accuracy	span = 0 Hz	$\pm$ 0.1 % (nom.)
	span $\geq$ 10 Hz, swept	$\pm$ 3 % (nom.)

<b>Spectral purity</b>		
SSB phase noise	frequency = 500 MHz, carrier offset	
	100 Hz	< -84 dBc (1 Hz)
	1 kHz	< -101 dBc (1 Hz)
	10 kHz	< -106 dBc (1 Hz)
	100 kHz	< -115 dBc (1 Hz)
	1 MHz	< -134 dBc (1 Hz)
	10 MHz	< -150 dBc (1 Hz) (nom.)
Residual FM	frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms	< 3 Hz (nom.)

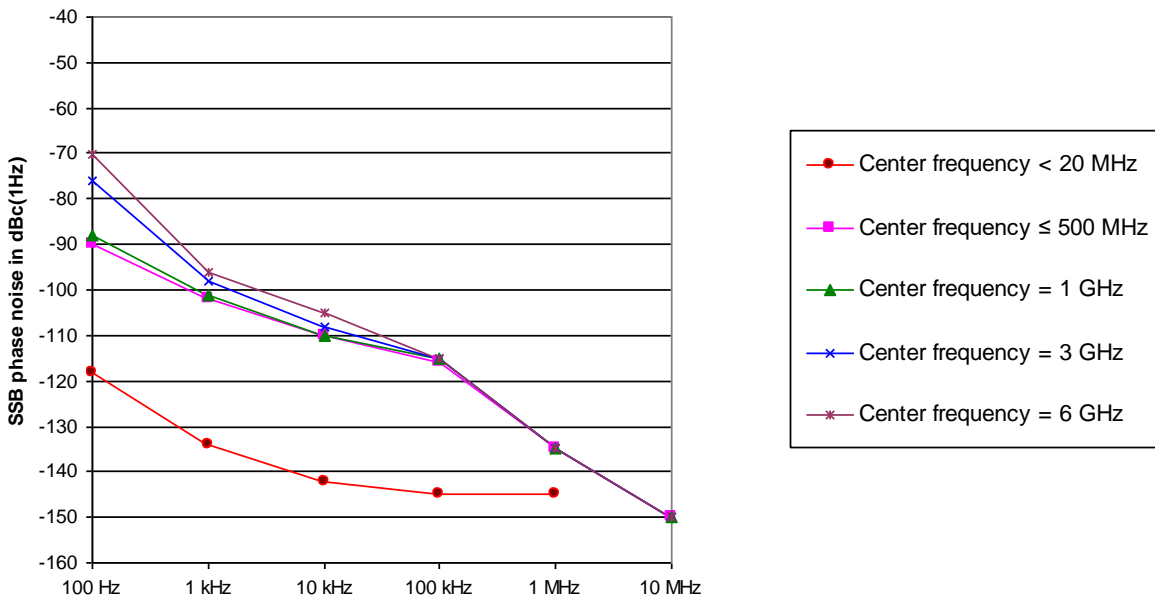

Typical phase noise at different center frequencies.

<sup>2</sup> Net sweep time without additional hardware settling time.

<sup>3</sup> Data acquisition time for FFT calculation.

## Preselection and preamplifier (R&S®ESRP-B2 option)

<b>Preselection</b>		
State	receiver mode	always on
	analyzer mode	on/off (selectable)
Number of preselection filters		16
Bandwidths (–6 dB), nominal	10 Hz to 150 kHz	fixed lowpass filter
	150 kHz to 30 MHz	35 MHz, fixed bandpass filter
	30 MHz to 80 MHz	94 MHz, fixed bandpass filter
	80 MHz to 130 MHz	94 MHz, fixed bandpass filter
	130 MHz to 180 MHz	91 MHz, fixed bandpass filter
	180 MHz to 230 MHz	105 MHz, fixed bandpass filter
	230 MHz to 300 MHz	110 MHz, fixed bandpass filter
	300 MHz to 425 MHz	195 MHz, fixed bandpass filter
	425 MHz to 570 MHz	200 MHz, fixed bandpass filter
	570 MHz to 715 MHz	210 MHz, fixed bandpass filter
	715 MHz to 860 MHz	200 MHz, fixed bandpass filter
	860 MHz to 1005 MHz	200 MHz, fixed bandpass filter
	1005 MHz to 1750 MHz	fixed highpass filter
	1750 MHz to 2850 MHz	fixed highpass filter
2850 MHz to 4850 MHz	fixed highpass filter	
4850 MHz to 7000 MHz	fixed highpass filter	
<b>Preamplifier</b>		
Location		in the signal path between preselection and 1 <sup>st</sup> mixer
Frequency range		1 kHz to 7 GHz
Gain		20 dB (nom.)

## RF preamplifier (R&S®FSV-B22 option)

<b>Preamplifier</b>		
Availability	instruments without R&S®ESRP-B2 option	receiver, analyzer
	instruments with R&S®ESRP-B2 option	analyzer with preselection = off only
Frequency range		100 kHz to 7 GHz
Gain		20 dB (nom.)

## IF and resolution bandwidths

<b>IF and sweep filters</b>		
Resolution bandwidths (–3 dB)	receiver mode or analyzer mode, span ≥ 10 Hz	10 Hz to 10 MHz in 1/2/3/5 sequence
	analyzer mode, span = 0 Hz	20 MHz, 28 MHz, 40 MHz additionally
Bandwidth uncertainty		< 3 %
Shape factor 60 dB:3 dB		< 5
EMI bandwidths (–6 dB)	standard	200 Hz, 9 kHz, 120 kHz, 1 MHz
	with R&S®ESRP-B29 option	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz additionally
Bandwidth uncertainty		< 3 %
Shape factor 60 dB:6 dB		< 4

<b>FFT filters (analyzer mode)</b>		
Resolution bandwidths (–3 dB)	span ≥ 10 Hz	10 Hz to 300 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

Channel filters (analyzer mode)		
Bandwidths (-3 dB)	standard (RRC = root raised cosine)	100/200/300/500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/24.3 (RRC)/ 25/30/50/100/150/192/200/300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/10/20/28/40 MHz
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

Video bandwidths (analyzer mode)		1 Hz to 10 MHz in 1/2/3/5 sequence, 20 MHz, 28 MHz, 40 MHz
----------------------------------	--	---

## Level

Display range		displayed noise floor up to +30 dBm
---------------	--	-------------------------------------

Max. input level	AC coupled	50 V
	DC coupled	0 V
CW RF power	RF attenuation = 0 dB	
	RF preamplifier = off	20 dBm (= 0.1 W)
	RF preamplifier = on	13 dBm (= 0.02 W)
	RF attenuation ≥ 10 dB	
	RF preamplifier = off	30 dBm (= 1 W)
	RF preamplifier = on	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation ≥ 0 dB, preselection = on <sup>4</sup> , RF preamplifier = off	97 dB μV/MHz
Max. pulse voltage	RF attenuation ≥ 10 dB	150 V
Max. pulse energy	RF attenuation ≥ 10 dB, 10 μs	1 mWs

Intermodulation			
1 dB compression of input mixer	RF attenuation = 0 dB, preselection and preamplifier = off <sup>5</sup>	+3 dBm (nom.)	
Third-order intercept point (TOI)	RF attenuation = 0 dB, level = 2 × -15 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger, preselection = off <sup>5</sup> , with R&S®FSV-B22 option: RF preamplifier = off		
	10 MHz ≤ f <sub>in</sub> < 100 MHz	> 12 dBm, 15 dBm (typ.)	
	100 MHz ≤ f <sub>in</sub> < 3.6 GHz	> 13 dBm, 16 dBm (typ.)	
	3.6 GHz ≤ f <sub>in</sub> ≤ 7 GHz	> 15 dBm, 18 dBm (typ.)	
	with R&S®ESRP-B2 option, preselection = on <sup>6</sup> , preamplifier = off, RF attenuation = 0 dB, level = 2 × -20 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger		
	10 MHz ≤ f <sub>in</sub> < 100 MHz	> 5 dBm, 8 dBm (typ.)	
	100 MHz ≤ f <sub>in</sub> < 4.5 GHz	> 8 dBm, 11 dBm (typ.)	
	4.5 GHz ≤ f <sub>in</sub> ≤ 7 GHz	> 5 dBm, 8 dBm (typ.)	
	with R&S®ESRP-B2 option, preselection = on <sup>6</sup> , preamplifier = on, RF attenuation = 0 dB, level = 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger		
	10 MHz ≤ f <sub>in</sub> < 100 MHz	> -16 dBm, -13 dBm (typ.)	
	100 MHz ≤ f <sub>in</sub> < 3.6 GHz	> -14 dBm, -11 dBm (typ.)	
	3.6 GHz ≤ f <sub>in</sub> ≤ 7 GHz	> -10 dBm, -7 dBm (typ.)	
	with R&S®FSV-B22 option, preselection = off <sup>5</sup> , RF preamplifier = on, RF attenuation = 0 dB, level = 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger		
10 MHz ≤ f <sub>in</sub> < 100 MHz	-3 dBm (nom.)		
100 MHz ≤ f <sub>in</sub> < 3.6 GHz	-2 dBm (nom.)		
3.6 GHz ≤ f <sub>in</sub> ≤ 7 GHz	0 dBm (nom.)		

<sup>4</sup> With R&S®ESRP-B2 option.

<sup>5</sup> With R&S®ESRP-B2 option. Preselection = off is only available in analyzer mode. In receiver mode the preselection is permanently on.

<sup>6</sup> With R&S®ESRP-B2 option. Default setting in receiver mode.

Second harmonic intercept (SHI)	RF attenuation = 0 dB, level = -10 dBm, preselection = off <sup>5</sup> , with R&S®FSV-B22 option: RF preamplifier = off	
	100 MHz < f <sub>in</sub> ≤ 3.5 GHz	45 dBm (nom.)
	with R&S®ESRP-B2 option, RF attenuation = 0 dB, level = -15 dBm, preselection = on <sup>6</sup> , preamplifier = off	
	100 MHz < f <sub>in</sub> ≤ 3.5 GHz	50 dBm (nom.)
	with R&S®ESRP-B2 option, RF attenuation = 0 dB, level = -10 dBm, preselection = on <sup>6</sup> , preamplifier = on	
	100 MHz < f <sub>in</sub> ≤ 3.5 GHz	35 dBm (nom.)
	with R&S®FSV-B22 option, preselection = off <sup>5</sup> , RF preamplifier = on, RF attenuation = 0 dB, level = -40 dBm	
	100 MHz < f <sub>in</sub> ≤ 3.5 GHz	25 dBm (nom.)

Displayed average noise level (analyzer mode)	RF attenuation = 0 dB, preselection = off/on <sup>7</sup> , preamplifier = off, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker	
	R&S®ESRP3, R&S®ESRP7	
	9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
	100 kHz ≤ f < 1 MHz	< -145 dBm, -150 dBm (typ.)
	1 MHz ≤ f < 1 GHz	< -152 dBm, -155 dBm (typ.)
	1 GHz ≤ f < 3.6 GHz	< -150 dBm, -151 dBm (typ.)
	R&S®ESRP7	
	3.6 GHz ≤ f < 6 GHz	< -148 dBm, -151 dBm (typ.)
	6 GHz ≤ f ≤ 7 GHz	< -146 dBm, -149 dBm (typ.)
	with R&S®ESRP-B29 option, RF attenuation = 0 dB, preselection = off/on <sup>7</sup> , preamplifier = off, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 10 Hz, VBW = 10 Hz, zero span, sweep time = 500 ms, sample detector, trace average, sweep count = 20, mean marker	
	R&S®ESRP3, R&S®ESRP7	
	10 Hz	< -90 dBm, -100 dBm (typ.)
	20 Hz	< -100 dBm, -110 dBm (typ.)
	100 Hz	< -110 dBm, -120 dBm (typ.)
	1 kHz	< -120 dBm, -130 dBm (typ.)
	with R&S®ESRP-B2 option, RF attenuation = 0 dB, preselection = on, preamplifier = on, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker	
	R&S®ESRP3, R&S®ESRP7	
	9 kHz ≤ f < 100 kHz	< -150 dBm, -155 dBm (typ.)
	100 kHz ≤ f < 1 MHz	< -155 dBm, -160 dBm (typ.)
	1 MHz ≤ f < 1 GHz	< -165 dBm, -168 dBm (typ.)
	1 GHz ≤ f < 3.6 GHz	< -162 dBm, -165 dBm (typ.)
	R&S®ESRP7	
	3.6 GHz ≤ f < 6 GHz	< -160 dBm, -163 dBm (typ.)
	6 GHz ≤ f ≤ 7 GHz	< -158 dBm, -161 dBm (typ.)
	with R&S®ESRP-B2 and R&S®ESRP-B29 option, RF attenuation = 0 dB, preselection = on, preamplifier = on, termination = 50 Ω, log. scaling, normalized to 10 Hz RBW, RBW = 10 Hz, VBW = 5 Hz, zero span, sweep time = 500 ms, sample detector, trace average, sweep count = 20, mean marker	
	R&S®ESRP3, R&S®ESRP7	
	1 kHz	< -140 dBm, -150 dBm (typ.)
	with R&S®FSV-B22 option, RF attenuation = 0 dB, preselection = off <sup>7</sup> , RF preamplifier = on, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker	
R&S®ESRP3, R&S®ESRP7		
100 kHz ≤ f < 1 MHz	< -150 dBm, -155 dBm (typ.)	
1 MHz ≤ f < 1 GHz	< -162 dBm, -165 dBm (typ.)	
1 GHz ≤ f < 3.6 GHz	< -160 dBm, -163 dBm (typ.)	
R&S®ESRP7		
3.6 GHz ≤ f < 6 GHz	< -158 dBm, -161 dBm (typ.)	
6 GHz ≤ f ≤ 7 GHz	< -156 dBm, -159 dBm (typ.)	

<sup>7</sup> With R&S®ESRP-B2 option. Preselection = off is only available in analyzer mode. In receiver mode preselection is permanently on.



<b>Noise indication (receiver mode),</b> nominal, calculated from DANL data	RF attenuation = 0 dB, preamplifier = off, termination = 50 $\Omega$ , average detector (AV)	
	R&S®ESRP3, R&S®ESRP7	
	9 kHz $\leq$ f < 100 kHz, BW = 200 Hz	< 0 dB $\mu$ V
	100 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -15 dB $\mu$ V
	150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< 2 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -5 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< 6 dB $\mu$ V
	1 GHz $\leq$ f < 3.6 GHz, BW = 1 MHz	< 17 dB $\mu$ V
	R&S®ESRP7	
	3.6 GHz $\leq$ f < 6 GHz, BW = 1 MHz	< 19 dB $\mu$ V
	6 GHz $\leq$ f $\leq$ 7 GHz, BW = 1 MHz	< 21 dB $\mu$ V
	with R&S®ESRP-B29 option, RF attenuation = 0 dB, preamplifier = off, termination = 50 $\Omega$ , average detector (AV)	
	R&S®ESRP3, R&S®ESRP7	
	10 Hz, BW = 10 Hz	< 27 dB $\mu$ V
	20 Hz, BW = 10 Hz	< 17 dB $\mu$ V
	100 Hz, BW = 10 Hz	< 7 dB $\mu$ V
	1 kHz, BW = 100 Hz	< 7 dB $\mu$ V
	with R&S®ESRP-B2 option, RF attenuation = 0 dB, preamplifier = on, termination = 50 $\Omega$ , average detector (AV)	
	R&S®ESRP3, R&S®ESRP7	
	9 kHz $\leq$ f < 100 kHz, BW = 200 Hz	< -20 dB $\mu$ V
	100 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< -8 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -18 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -7 dB $\mu$ V
	1 GHz $\leq$ f < 3.6 GHz, BW = 1 MHz	< 5 dB $\mu$ V
	R&S®ESRP7	
	3.6 GHz $\leq$ f < 6 GHz, BW = 1 MHz	< 7 dB $\mu$ V
6 GHz $\leq$ f $\leq$ 7 GHz, BW = 1 MHz	< 9 dB $\mu$ V	
with R&S®ESRP-B2 option and R&S®ESRP-B29 option, RF attenuation = 0 dB, preamplifier = on, termination = 50 $\Omega$ , average detector (AV)		
R&S®ESRP3, R&S®ESRP7		
1 kHz, BW = 100 Hz	< -13 dB $\mu$ V	
with R&S®FSV-B22 option (instruments without R&S®ESRP-B2 option only), RF attenuation = 0 dB, preamplifier = on, termination = 50 $\Omega$ , average detector (AV)		
100 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -20 dB $\mu$ V	
150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< -3 dB $\mu$ V	
1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -15 dB $\mu$ V	
30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -4 dB $\mu$ V	
1 GHz $\leq$ f < 3.6 GHz, BW = 1 MHz	< 7 dB $\mu$ V	
R&S®ESRP7		
3.6 GHz $\leq$ f < 6 GHz, BW = 1 MHz	< 9 dB $\mu$ V	
6 GHz $\leq$ f $\leq$ 7 GHz, BW = 1 MHz	< 11 dB $\mu$ V	

<b>Spurious responses</b>		
Image response	30 MHz $\leq$ f $\leq$ 7 GHz	
	$f_{in} - 2 \times 8409.9$ MHz (1st IF)	< -80 dBc (nom.)
	$f_{in} - 2 \times 729.9$ MHz (2nd IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (3rd IF)	< -80 dBc
Intermediate frequency response	30 MHz $\leq$ f $\leq$ 7 GHz	
	1st IF (8409.9 MHz)	< -70 dBc (nom.)
	2nd IF (729.9 MHz)	< -80 dBc
	3rd IF (89.9 MHz)	< -80 dBc
Residual spurious response	RF attenuation = 0 dB	
	f $\leq$ 1 MHz	< -90 dBm
	f > 1 MHz	< -103 dBm
Local oscillator related spurious	30 MHz $\leq$ f $\leq$ 7 GHz	
	1 kHz $\leq$ offset from carrier $\leq$ 10 MHz	< -70 dBc
	offset from carrier > 10 MHz	< -80 dBc
Other interfering signals		
Subharmonic of 1st LO	20 MHz $\leq$ f < 7 GHz, spurious at 8410 MHz - 2 $\times$ $f_{in}$	< -70 dBc
Harmonic of 1st LO	mixer level < -25 dBm, spurious at $f_{in} - 4205$ MHz	< -70 dBc

<b>Level display (analyzer mode)</b>		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average, quasi-peak, CISPR-average, RMS-average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Level display (receiver mode)</b>		
Level display	analog	bargraph display, separately for each detector
	digital	numeric; 0.01 dB resolution
Detectors	max. 4 selectable	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
Units of level axis		dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW, dBpT
RF spectrum		
Logarithmic level axis		10 dB to 200 dB, in steps of 10
Frequency axis		linear or logarithmic
Number of traces		6
Detectors	normal scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
	time domain scan <sup>8</sup>	max. peak, min. peak, average, quasi-peak, CISPR-average, RMS-average

<b>Spectrogram display (analyzer mode)</b>		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100 000 frames
Recording mode		single trace, continuous, frame count
Trace detector		max. peak, min. peak, sample, RMS, average
Number of markers		16
Marker readout		frequency, time/frame number, level

<sup>8</sup> Requires R&S®ESRP-K53 option.

<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, CW signal, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB	
	+20 °C to +30 °C	
	preselection = off <sup>9</sup>	< 0.2 dB ( $\sigma = 0.07$ dB)
	preselection = on <sup>10</sup>	< 0.3 dB ( $\sigma = 0.1$ dB)
	+5 °C to +40 °C	
	preselection = off <sup>9</sup>	< 0.35 dB ( $\sigma = 0.12$ dB)
Frequency response referenced to 64 MHz	DC coupling, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = off <sup>9</sup> , with R&S®FSV-B22 option: RF preamplifier = off, +20 °C to +30 °C	
	9 kHz ≤ f < 10 MHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	10 MHz ≤ f < 3.6 GHz	< 0.3 dB ( $\sigma = 0.1$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	DC coupling, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = on <sup>10</sup> , +20 °C to +30 °C	
	9 kHz ≤ f < 3.6 GHz	< 0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	any setting for RF attenuation, preselection and preamplifier, +5 °C to +40 °C	
	9 kHz ≤ f < 3.6 GHz	< 1 dB ( $\sigma = 0.33$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 1.5 dB ( $\sigma = 0.5$ dB)
	with R&S®ESRP-B29 option, DC coupling, preamplifier = off, +5 °C to +40 °C	
	10 Hz ≤ f < 9 kHz	< 1 dB ( $\sigma = 0.33$ dB)
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting		0 dB <sup>11</sup> (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	
	sweep filters	< 0.1 dB ( $\sigma = 0.04$ dB)
	FFT filters	< 0.2 dB ( $\sigma = 0.07$ dB)
Quasi-peak display	pulse repetition frequency ≥ 20 Hz	in line with CISPR 16-1-1
	with R&S®ESRP-B2 option, pulse repetition frequency ≥ 10 Hz	in line with CISPR 16-1-1

<b>Nonlinearity of displayed level</b>		
Logarithmic level display	S/N > 16 dB	
	0 dB to -50 dB	< 0.1 dB ( $\sigma = 0.04$ dB)
	-50 dB to -60 dB	< 0.15 dB ( $\sigma = 0.05$ dB)
	-60 dB to -70 dB	< 0.2 dB ( $\sigma = 0.07$ dB)
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

<b>Total measurement uncertainty</b>		
	CW signal, level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = off <sup>9</sup> , with R&S®FSV-B22 option: RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz ≤ f < 10 MHz	0.4 dB
	10 MHz ≤ f < 3.6 GHz	0.31 dB
	3.6 GHz ≤ f ≤ 7 GHz	0.4 dB
	CW signal, level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = on <sup>10</sup> , span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz ≤ f < 3.6 GHz	0.47 dB
	3.6 GHz ≤ f ≤ 7 GHz	0.57 dB

<sup>9</sup> With R&S®ESRP-B2 option. Preselection = off is only available in analyzer mode. In receiver mode the preselection is permanently on.

<sup>10</sup> With R&S®ESRP-B2 option. Default setting in receiver mode.

<sup>11</sup> The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

## Trigger functions

<b>Trigger</b>		
Trigger source	analyzer mode	free run, video, external, IF power
	receiver mode	free run, video, external
Trigger offset	analyzer mode, span $\geq$ 10 Hz	31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of offset)
	analyzer mode, span = 0 Hz	(–sweep time) to 30 s, min. resolution = 31.25 ns (or 1 % of offset)
Max. deviation of trigger offset	analyzer mode	$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{trigger offset}))$
<b>IF power trigger (analyzer mode)</b>		
Sensitivity	min. signal power	–60 dBm + RF attenuation – RF pre-amplifier gain (nom.)
	max. signal power	–10 dBm + RF attenuation – RF pre-amplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz, swept	40 MHz (nom.)
	RBW > 20 kHz, FFT	
	RBW $\leq$ 500 kHz, swept	6 MHz (nom.)
	RBW $\leq$ 20 kHz, FFT	
<b>Gated sweep (analyzer mode)</b>		
Gate source		video, external, IF power
Gate delay		31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of delay)
Gate length		31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of gate length)
Max. deviation of gate length		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{gate length}))$

## Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

## Inputs and outputs

<b>RF input</b>		
Impedance		50 $\Omega$
Connector		N female
VSWR	RF attenuation $\geq 10$ dB, DC coupled	
	10 Hz $\leq f \leq 1$ GHz	< 1.2
	1 GHz < f < 3.6 GHz	< 1.5, 1.3 (typ.)
	3.6 GHz $\leq f \leq 7$ GHz	< 2, 1.8 (typ.)
	RF attenuation < 10 dB, DC coupled	
	10 Hz $\leq f \leq 1$ GHz	< 2
	1 GHz < f $\leq 7$ GHz	< 3
	RF attenuation $\geq 10$ dB, AC coupled	
	10 MHz $\leq f \leq 1$ GHz	< 1.2
1 GHz < f < 3.6 GHz	< 1.5, 1.3 (typ.)	
3.6 GHz $\leq f \leq 7$ GHz	< 2, 1.8 (typ.)	
Setting range of attenuator		0 dB to +70 dB, in 10 dB steps

<b>Probe power supply</b>		
Supply voltages	3-pin connector	+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)
	5-pin connector	$\pm 10$ V DC and ground, max. 100 mA, (nom.)

<b>Noise source drive</b>		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

<b>AF output</b>		
Connector		3.5 mm mini jack
Output impedance		10 $\Omega$ (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

<b>USB interface</b>		
	front panel	2 ports, type A plug, version 2.0
	rear panel	2 ports, type A plug, version 2.0

<b>Reference output</b>		
Connector		BNC female
Impedance		50 $\Omega$ (nom.)
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

<b>Reference input</b>		
Connector		BNC female
Impedance		50 $\Omega$ (nom.)
Input frequency range		1 MHz $\leq f_{in} \leq 20$ MHz, in 100 kHz steps
Required level		> 0 dBm into 50 $\Omega$ (nom.)

<b>External trigger/gate input</b>		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V (nom.)
Input impedance		10 k $\Omega$ (nom.)

<b>IEC/IEEE bus control</b>		
		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		10/100/1000BASE-T
Connector		RJ-45

<b>External monitor</b>		
Connector		VGA-compatible, 15-pin mini D-Sub

<b>User port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

<b>IF/video out (analyzer mode)</b>		
Connector		BNC female, 50 $\Omega$ (nom.)
<b>IF out</b>		
Bandwidth		= RBW setting
IF frequency		32 MHz (nom.)
Output level (gain versus RF input)	RF attenuation = 0 dB, RF preamplifier = off, span = 0 Hz	0 dB (nom.)
<b>Video out</b>		
Bandwidth		= VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V, open circuit (nom.)

<b>Trigger out</b>		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

## General data

<b>Display</b>		21 cm LC TFT color display (8.4")
Resolution		800 × 600 pixel (SVGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

<b>Data storage</b>		
Internal	standard	hard disk $\geq$ 40 Gbyte
	with R&S®ESRP-B18 option	solid state disk $\geq$ 8 Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +40 °C
	permissible temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 130 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-T-28800F, class 3, MIL-STD-810E, method 516.4, procedure I

<b>EMC</b>		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>12, 13</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>12</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	--	--

<b>Recommended calibration interval</b>		1 year
---	--	--------

<b>Power supply</b>		
AC input voltage range		100 V to 240 V, $\pm 10$ % (nom.)
AC supply frequency		50 Hz to 400 Hz, $+10$ %/ $-6$ % (nom.)
Max. input current		3 A (100 V) to 1.25 A (240 V) (nom.)
Power consumption		100 W, max. 180 W with all options (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1-04, UL 61010-1
Test mark		VDE-GS, cCSA <sub>US</sub>

<b>Dimensions and weight</b>		
Dimensions (nom.)	W × H × D	412 mm × 197 mm × 417 mm (16.22 in × 7.76 in × 16.42 in)
Net weight without options (nom.)		9.5 kg (20.94 lb)

<sup>12</sup> Emission limits for class B equipment.

<sup>13</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

## Options

### R&S®ESR-B10 external generator control

Interface		
IEC/IEEE bus control		24-pin Amphenol female
Aux control		9-pin D-Sub female
Supported signal generators		
		R&S®SGS100A, R&S®SMA100A, R&S®SMB100A, R&S®SMBV100A, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMX, R&S®SMY

### R&S®FSV-B9 tracking generator (spectrum analyzer mode)

Frequency		
Frequency range	R&S®ESRP3	9 kHz to 3.6 GHz
	R&S®ESRP7	9 kHz to 7 GHz
Frequency offset		
Setting range		±1 GHz
Setting resolution		1 Hz
Spectral purity		
SSB phase noise	frequency = 1000 MHz, carrier offset = 100 kHz	-90 dBc (1 Hz) (typ.)
Level		
Setting range	normal mode, $9 \text{ kHz} \leq f < 100 \text{ kHz}$ normal mode, $f \geq 100 \text{ kHz}$ with AM, I/Q, $9 \text{ kHz} \leq f < 100 \text{ kHz}$ with AM, I/Q, $f \geq 100 \text{ kHz}$	-60 dBm to -10 dBm, in 0.1 dB steps -60 dBm to 0 dBm, in 0.1 dB steps -60 dBm to -20 dBm, in 0.1 dB steps -60 dBm to -10 dBm, in 0.1 dB steps
Max. deviation of output level	frequency = 64 MHz, +20 °C to +30 °C, output level = -10 dBm, frequency offset = 0 Hz, modulation = off	< 1 dB
Frequency response	output level = -10 dBm, referenced to level at 64 MHz, $100 \text{ kHz} \leq f \leq 7 \text{ GHz}$ , frequency offset = 0 Hz, modulation = off	
	$9 \text{ kHz} \leq f < 100 \text{ kHz}$	< 4 dB
	$100 \text{ kHz} \leq f \leq 7 \text{ GHz}$	< 3 dB
Dynamic range		
	RBW = 1 kHz, $f > 10 \text{ MHz}$	110 dB
Harmonics, nonharmonic spurious		
	output level = -10 dBm	-30 dBc
Modulation		
Modulation format	external	I/Q, AM, FM
<b>AM</b>	$f > 10 \text{ MHz}$	
Modulation depth		0 % to 100 %
Modulation frequency range		0 Hz to 1 MHz
<b>FM</b>	$f > 10 \text{ MHz}$	
Frequency deviation		0 Hz to 10 MHz
Modulation frequency range		0 Hz to 10 kHz



<b>RF output</b>		
Connector		N female, 50 Ω
VSWR		1.3, nominal

<b>TG I/AM IN</b>		
Connector		BNC female, 50 Ω
Input voltage		1 V ( $V_{pp}$ )

<b>TG Q/FM IN</b>		
Connector		BNC female, 50 Ω
Input voltage		1 V ( $V_{pp}$ )

## R&S®FSV-B30 DC power supply for 12 V/24 V supply voltage

Input voltage range		10 V to 28 V
Output voltage		120 V to 360 V DC
Input current	$V_{in} = 12 V$ , instrument without options, preset settings R&S®ESRP3, R&S®ESRP7	11 A (typ.)
Temperature	operating temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Dimensions	W x H x D	201 mm x 125 mm x 56 mm (7.91 in x 4.92 in x 2.20 in)
Net weight		1 kg (2.2 lb)

## R&S®FSV-B32 Lithium-ion battery pack

<b>Battery pack</b>		
Output voltage		12 V (nom.)
Operating time	instrument without options, preset settings	
	R&S®ESRP3, R&S®ESRP7	2 h (nom.)
Charge time	with R&S®FSV-B34 charger, T = +25 °C	3.5 h (nom.)
Temperature	operating temperature range, discharge	0 °C to +50 °C
	operating temperature range, charge	0 °C to +45 °C
	storage temperature range	-20 °C to +60 °C <sup>14</sup>
Dimensions	W x H x D	406 mm x 71 mm x 241 mm (16 in x 2.76 in x 9.49 in)
Net weight		3.4 kg (7.5 lb)

## R&S®FSV-B34 charger for R&S®FSV-B32 Lithium-ion battery pack

AC input voltage range		100 V to 240 V, ±10 % (nom.)
AC supply frequency		50 Hz to 60 Hz (nom.)
Power consumption		max. 300 W (nom.)
Dimensions	W x H x D	400 mm x 127 mm x 203 mm (15.75 in x 5 in x 8 in)
Net weight		3.1 kg (6.9 lb)

## R&S®ESRP-K56 IF analysis

<b>Level display (receiver mode)</b>		
IF spectrum		
Span		max. 10 MHz
Resolution bandwidths		10 Hz to 100 kHz in 1/2/3/5 sequence
Detector		sample
Logarithmic level axis		10 dB to 200 dB in steps of 10 dB
Frequency axis		linear
Number of traces		3

<sup>14</sup> The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range < +21 °C. Extended exposure to temperatures above +45 °C could degrade battery performance and life.

## Ordering information

Designation	Type	Order No.
EMI Test Receiver	R&S®ESRP3	1316.4500.03
EMI Test Receiver	R&S®ESRP7	1316.4500.07
<b>Accessories supplied</b>		
Power cable, probe power cable and quick start guide		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
Ruggedized Housing	R&S®FSV-B1	1310.9500.02	no	
Preselection and Preamplifier	R&S®ESRP-B2	1316.4700.02	yes	retrofit in service center
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
OCXO Extended Frequency Stability	R&S®FSV-B4	1310.9522.03	yes	user-retrofittable
External Generator Control	R&S®ESR-B10	1310.9551.03	yes	retrofit in service center
Tracking Generator (100 kHz to 7 GHz)	R&S®FSV-B9	1310.9545.02	yes	retrofit in service center
Solid State Drive (removable hard drive) <sup>15</sup>	R&S®ESRP-B18	1316.3555.16	yes	user-retrofittable
Spare Hard Drive (removable hard drive) <sup>15</sup>	R&S®ESRP-B19	1316.3561.16	yes	user-retrofittable
RF Preamplifier (100 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable
Frequency Extension 10 Hz and MIL bandwidths	R&S®ESRP-B29	1316.4880.02	yes	user-retrofittable
DC Power Supply for 12 V/24 V supply voltage	R&S®FSV-B30	1329.0243.02	yes	user-retrofittable
Lithium-Ion Battery Pack	R&S®FSV-B32	1321.3750.04	yes	user-retrofittable, requires R&S®FSV-B1, R&S®FSV-B30 and R&S®FSV-B34
Lithium-Ion Battery Charger	R&S®FSV-B34	1321.3950.02		
<b>Firmware/software</b>				
Time Domain Scan	R&S®ESRP-K53	1316.4639.02		
IF Analysis	R&S®ESRP-K56	1316.4897.02		

## Upgrades

Designation	Type	Order No.	Retrofittable	Remarks
Windows 10 Upgrade for R&S®ESRP with FMR9 CPU board with hard drive	R&S®ESRP-U1	1321.3614.10	yes	contact service center
Windows 10 Upgrade R&S®ESRP with FMR9 CPU board with solid-state drive (SSD)	R&S®ESRP-U1	1321.3614.11	yes	contact service center

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-478	1096.3248.00
<b>Matching pads, 50/75 Ω</b>		
Matching Pad, 50/75 Ω, L Section, matching at both ends	R&S®RAM	0358.5414.02
Matching Pad, 50/75 Ω, series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>SWR bridges, 50 Ω</b>		
SWR Bridge, 50 Ω, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5x
SWR Bridge, 50 Ω, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5x
<b>High-power attenuators</b>		
High-Power Attenuator, 100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
High-Power Attenuator, 50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
High-Power Attenuator, 50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connector</b>		
Probe Power Connector, 3-pin		1065.9480.00
<b>DC block</b>		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02

<sup>15</sup> For instruments delivered with Windows 10 ex factory or instruments with upgrade R&S®ESRP-U1, Mod.10/11 only. For other models and spare parts contact your local Rohde & Schwarz service center.

Designation	Type	Order No.
<b>Service options</b>		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	

**Extended warranty with a term of one to two years (WE1 to WE2)**

Repairs carried out during the contract term are free of charge <sup>17</sup>. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

**Extended warranty with calibration (CW1 to CW2)**

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>17</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

---

<sup>17</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.



北京海洋兴业科技股份有限公司 (证券代码: 839145)

北京市西三旗东黄平路19号龙旗广场4号楼 (E座) 906室

电话: 010-62176775 62178811 62176785

企业QQ: 800057747 维修QQ: 508005118

企业官网: [www.hyxyyq.com](http://www.hyxyyq.com)

邮编: 100096

传真: 010-62176619

邮箱: [market@oitek.com.cn](mailto:market@oitek.com.cn)

购线网: [www.gooxian.com](http://www.gooxian.com)



扫描二维码关注我们  
查找微信公众号: 海洋仪器