


### Model 72920 2mm SAFETY Sheathed Patch Cords

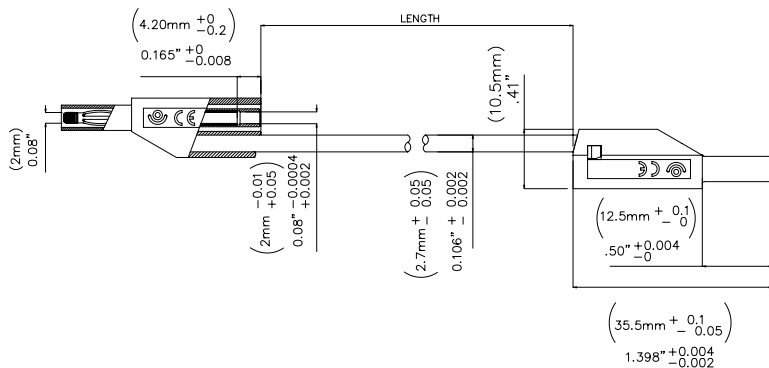

### Features

- Multi-stacking 2mm safety sheathed male/male patch cord, PVC
- Rating: 600V Cat II
- 10A Max.

### Materials

- Plug Body: Nickel Plated Brass
- Spring: Nickel plated Beryllium copper
- Spring tip: Polysulfone
- Insulation: Polypropylene.
- Wire Insulation: PVC.

### Ordering Information

Model: 72920-Length-Color  
 Lengths: 20 inch (50cm) or 39in (100mm)  
 Colors: Black (-0) or Red (-2)

### Specifications

Operating Temperature	-20 °C to +80 °C
Max Current	10A
Max Voltage	600 V CAT II
Max Resistance	15 m Ω at 20 inch 20 m Ω at 39 inch

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02''$  (.51 mm), .xxx =  $\pm 0.005''$  (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.