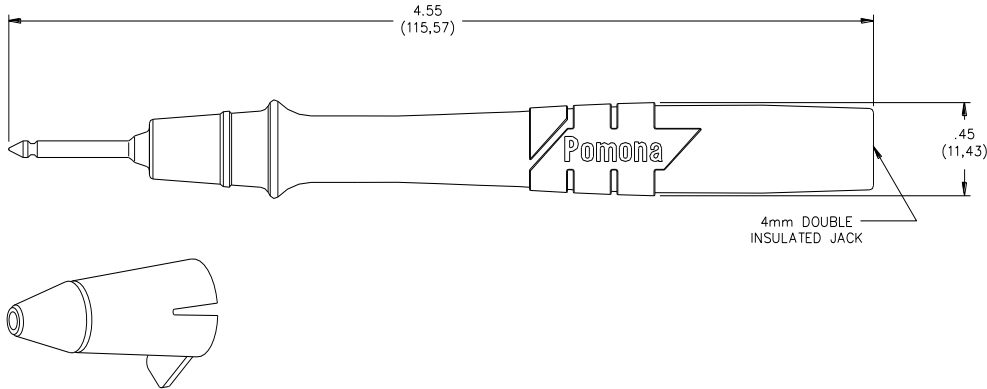


**Model 6232A**  
**Modular Test Probe with Standard 0.080 (2mm) Tip**

PROTECTIVE CAP

**FEATURES**

- Modular designed for use with Pomona CE test lead sets, or any other modular test leads with a CE safety style sheathed banana jack.
- Notched .080" (2mm) probe tip; notch near probe tip end helps keep probe from sliding off test points.
- Probe tip mates with 0.080 (2mm) pin tip jacks.

**MATERIALS**

Probe Body: Black or Red Polypropylene

Tip: Nickel plated brass, notched .080" (2mm) tip

Jack: Nickel plated brass, .166" (4mm) safety style sheathed banana jack

**RATINGS**Operating Voltage: IEC 61010-031, CAT III 1000 V (with protective cap),  
CAT II 1000 V (without protective cap).

Current: 10 Amperes

**ORDERING INFORMATION:**

Model# 6232A (Set includes one black and one red probe)

Probes can be used with the following Pomona CE test lead sets:

- 5907A \* Straight banana plug to right-angle banana plug test lead set; length 48" (122.0cm)
- 5908A \* Straight banana plug to straight banana plug test lead set; length 48" (122.0cm)
- 5909A \* Right-angle banana plug to right-angle banana plug test lead set; length , 48" (122.0cm)
- 6358 \* Straight banana plug to Retractable sheath banana plug test lead set; length 48" (122.0cm)

\* See data sheets for specifications



All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm),  
.xxx =  $\pm .005$ " (.127 mm). All specifications are to the latest revisions.  
Specifications are subject to change without notice. Registered trademarks are  
the property of their respective companies.