


### Model 72925 Do-It-Yourself 2mm Stackable Safety Sheathed Plug

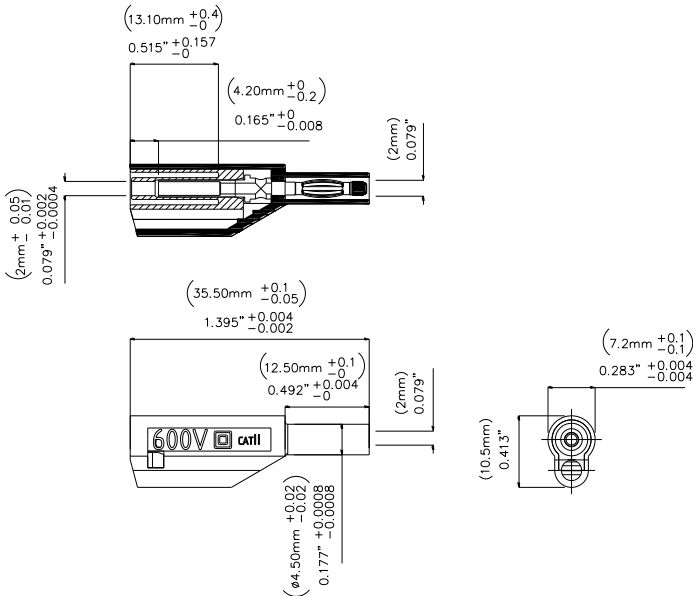

### Features

- Build your own 2mm stackable test leads
- Plug spring is Beryllium Copper for long insertion life
- Safety rating CAT II 600V *when plug is correctly assembled and terminated.*

### Materials

Plastic body:	Polypropylene
Plug body:	Brass, Nickel Plated
Spring:	Beryllium Copper, Nickel Plated
Spring Tip:	Polysulfone

### Specifications

Current	Max. 10A
Voltage	600 V CAT II
Max Resistance	Less than 5 mΩ

### Ordering Information

Model **72925**-Color  
Colors: **-0** (black) and **-2** (red)

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02$ " (.51 mm), .xxx =  $\pm 0.005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.