


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/19/13	D.GRIFFIN

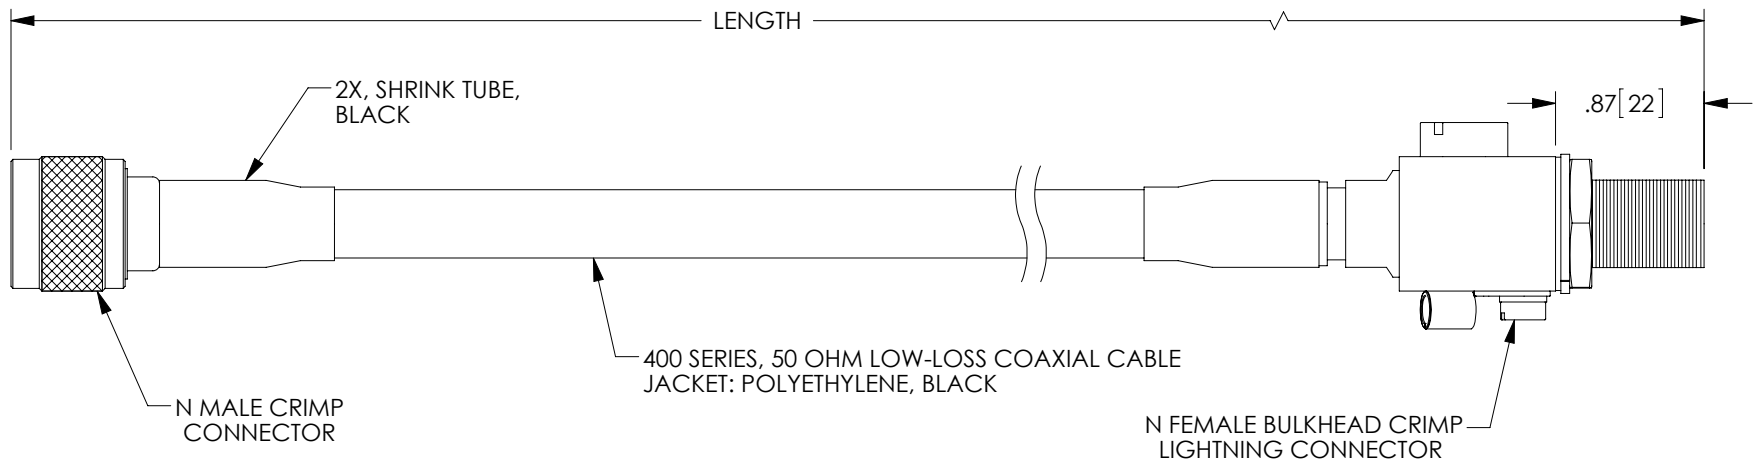

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA4NMLPNFXXX	WHERE XXX = LENGTH IN FEET	CA4NMLPNF010 (10 FEET)
CA4NMLPNFNXX	WHERE NXX = LENGTH IN INCHES	CA4NMLPNFN16 (16 INCHES)
CA4NMLPNFMXX	WHERE MXX = LENGTH IN METERS	CA4NMLPNFM07 (7 METERS)
CA4NMLPNFXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA4NMLPNF3M5 (3.5 METERS)


NOTES:

LP ELECTRICAL SPECS:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0 - 5.8GHz
GAS TUBE BREAKDOWN VOLTAGE: 90V $\pm$ 20%

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

RoHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS	DATE	 Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY B.PUCHASKI	08/19/13			
	CHECKED BY P.PESA	08/16/13	CATEGORY		
	APPROVED BY P.PESA	08/19/13	COAXIAL		
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION		
			CA400 NM-NF LP		
			SIZE A	FSCM NO. 43321	DWG. NO. CA4NMLPNF
		SCALE: NONE		CAD FILE: CA4NMLPNF.SLDDRW	SHEET 1 OF 1